Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Solus

Supplier's address: Help Desk, Knockmitten Lane 1, D12AX7F Dublin 12 Dublin, IE

Model identifier: 060040

Type of light source:


(or other electric interface) Mains or non-mains:	MLS	Connected light	No
Colour-tuneable light source:	No	source (CLS): Envelope:	
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Froduct parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/10 up to the neares	00 h), rounded	5	Energy efficiency class	F		
dicating if it refe a sphere (360°),	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	480 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	2 700		
On-mode pow pressed in W	ver (P _{on}), ex-	4,9	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
(P_{net}) for CLS, e	andby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	60	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	60 107	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi- nates (x and y)	0,458 0,410			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	0,90			
the lumen maintenance factor	0,96					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,40	Colour consistency in McAdam ellipses	6			
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4			

(a)_{'-'} : not applicable;

(b)'_-' : not applicable;

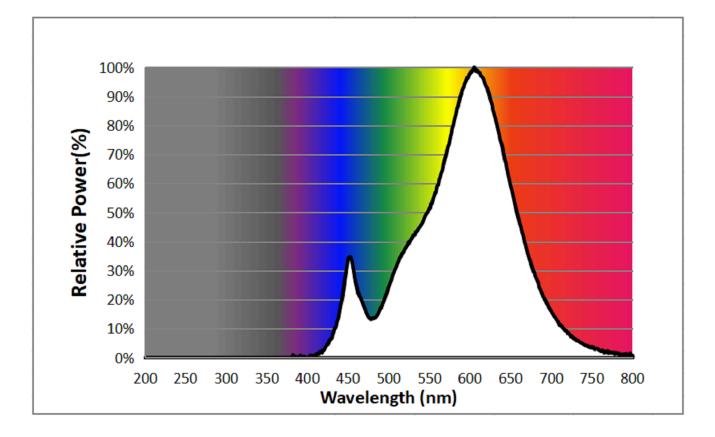

Model placed on the Union market from 11/10/2021Image: Second Second